



SOLTECH[™]
smart solar lighting

SunLike

LED SOLAR STREET LIGHT



Meet SOLTECH

With our long history of lighting innovation, SOLTECH brings its expertise to solar-powered LED lighting. Unlike most, we fully develop and manufacture the complete system from start to finish. This ensures you'll enjoy unrivalled quality and reliability, no matter your application.

We specialize in solar LED lighting for streets, highways, parks, parking lots, pathways, perimeters, general areas, and more.



Our Products




SunLike

Our most economical light, the all-in-one SunLike can be used for **pathways, parks, schools, perimeters,** and more.



Cegonia

With 90% downward light and elegant aesthetics, the Cegonia is optimized for **parking lots** but can be used for many applications.




Satelis


Our most advanced commercial lighting option, Satelis is best for **major roads** and **freeways**.

SunLike Specifications




OUTBEAM 	1600 Lumens	4000 Lumens	6000 Lumens
MODEL	TLSTC008XYZZ	TLSTC020XYZZ	TLSTC030XYZZ
CASING	Aluminium	Aluminium	Aluminium
DIMENSION	20x11x3in	26x17x4in	26x17x4in
EFFICIENCY	200 lm/w	200 lm/w	200 lm/w
LUMENS	1600 lm (8w)	4000 lm (20w)	6000 lm (30w)
LED CHIP	Lumileds 5050 (215lm/w - CRI>70)	Lumileds 5050 (215lm/w - CRI>70)	Lumileds 5050 (215lm/w - CRI>70)
SOLAR PANEL	17Wp	36Wp	52Wp
BATTERY	LiFePO4 - 9Ah 12.8V (115 Wh)	LiFePO4 - 20Ah 12.8V (256 Wh)	LiFePO4 - 30Ah 12.8V (384 Wh)
CHARGING TIME*	7 hrs	7 hrs	7 hrs
AUTONOMY AT FULL POWER	10 hrs	10 hrs	10 hrs
MAXIMUM AUTONOMY	50 hrs	50 hrs	50 hrs
OPERATION MODE	Remote control with one-key setting	Remote control with one-key setting	Remote control with one-key setting
WEIGHT	11.7 lb	21.4 lb	29.8 lb
INSTALLATION HEIGHT	6 to 13 ft	9 to 16 ft	9 to 19 ft
OPERATING TEMPERATURE	-4 to 122 °F	-4 to 122 °F	-4 to 122 °F


* WITH OPTIMAL CONDITIONS

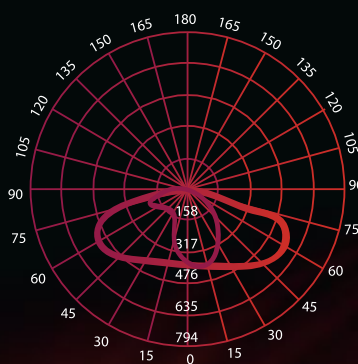

1600 Lumens

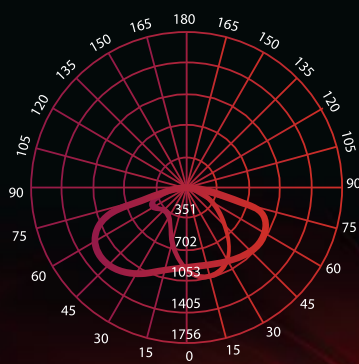


4000 Lumens

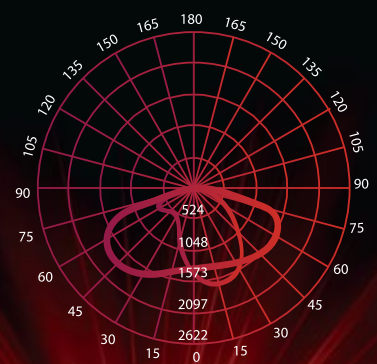


6000 Lumens

Various Mounting Accessories

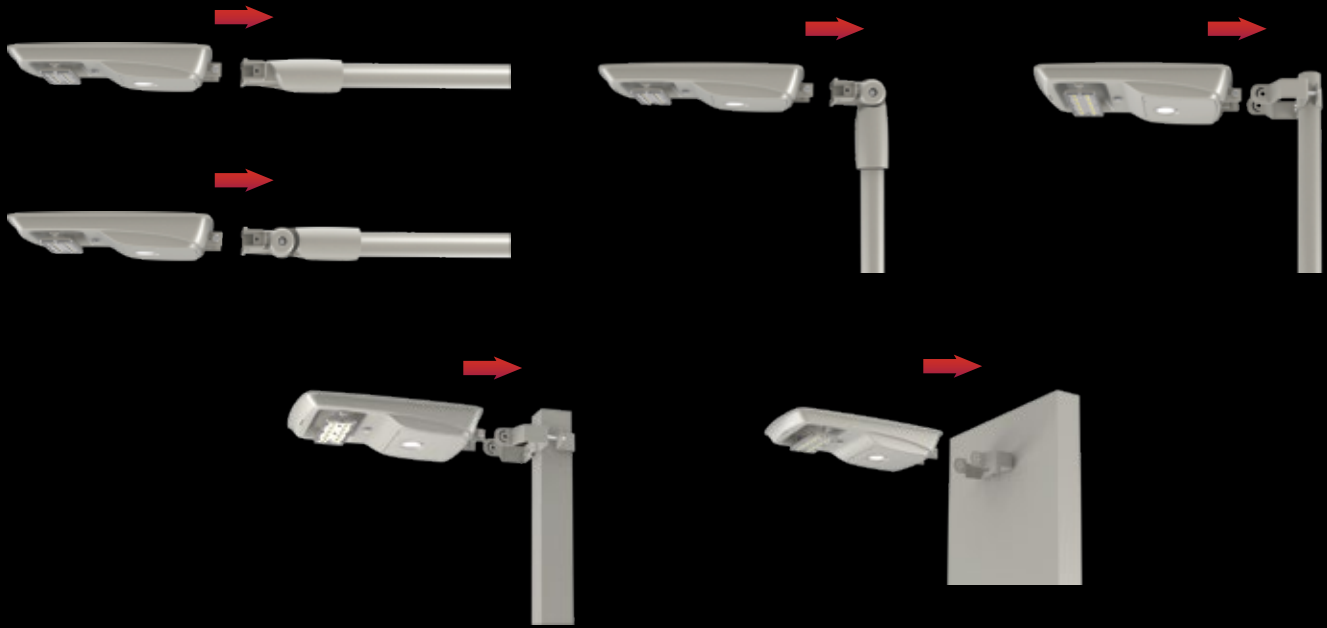

Packing Carton Dimensions

	BOX SIZE (mm)	QTY/CTN	GW (kg)	CUBIC METER (m ³)
8W	665x350 x160	1	7.8	0.038
20W	825x490x165	1	13.5	0.067
30W	1070x490x165	1	17.4	0.087

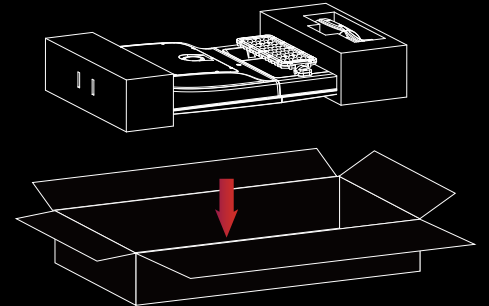

Remote Control

- Time Control Mode
- Constant Brightness Mode
- Induction Mode
- Lasting Time
- Disable
- Test Mode

