



FOCUS

Sign Lights
10W 20W

Installation Manual

SOLTECH offers Advanced LED
Technology That Is Eco-friendly And
Utilizes Clean Energy.



SOLTECH
Smart Solar Lighting

01 Introduction

Thank you for purchasing FOCUS Urban Lighting Products.

Important

Please read these instructions before installation to ensure optimum results and longevity of your lights. The solar panel should be charged in full sunlight for 8 to 9 hours before initial first use to provide optimum results.

Features

- Easy installation- no electrical wiring required with integrated design.
- Turns on automatically at night and off during the day.
- The lights include an On/Off switch and built in battery.
- Battery can support 5-6 nights with cloudy days.
- When fully charged, lights will operate up to 5 nights.
- Intelligent power saving mode increases light duration x 1.5 times.
- IP65 water and dust resistant.


How the Solar Panel Works

During the day, the solar panel converts sunlight into electricity to charge the battery. At night, the lights turn ON automatically using the

electricity stored in the battery. The performance of the solar lights is dependent on the location of the solar panel and/or weather conditions. Install the solar panel in a sunny position ensuring it receives 6-8 hours sunlight each day. Reduced sunlight will reduce continuous working hours at night. Please note: during continuous wet & overcast days, lighting time may be reduced as the battery will not be fully charged. The lights may stop working during longer rainy periods of more than 5 days & will return to normal function when the sun returns. After an extended period of poor weather restore the battery power by turning the unit off and, fully charge the battery for 8 hours in full sunlight. To test the light during daylight hours, fully cover the solar panel and press the main power button.

Please Note

During continuous rainy or cloudy days, run time may be reduced as the battery will not be fully charged.

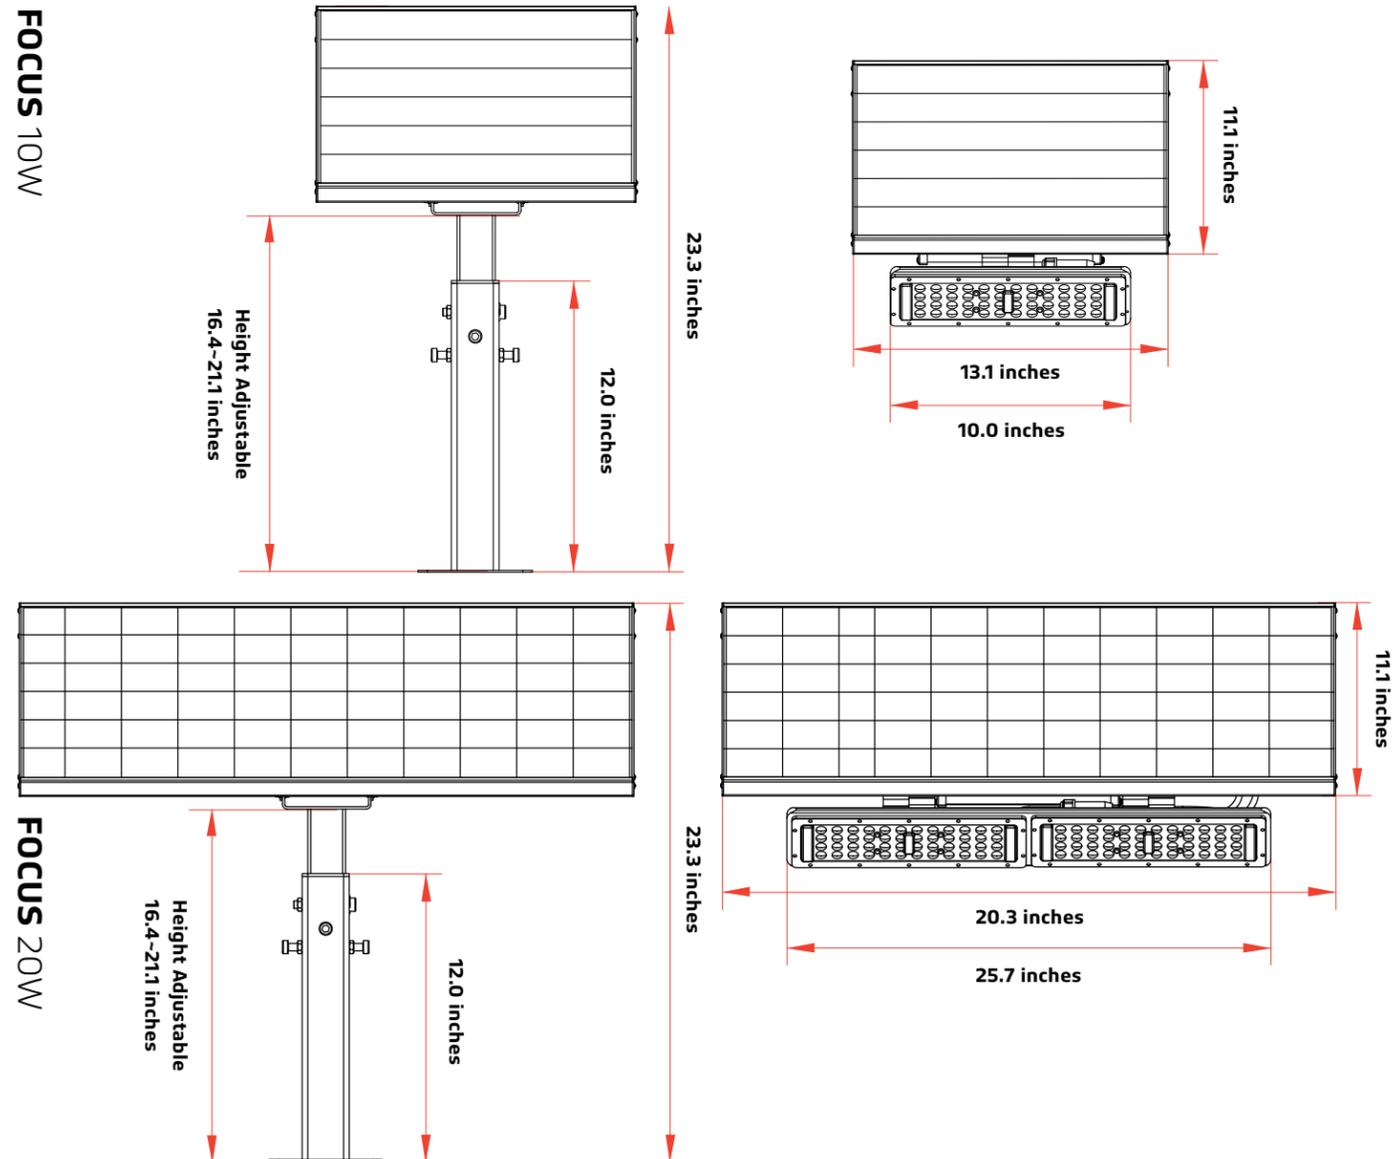

02 Specification

Specification	FOCUS 10W	FOCUS 20W
LED Nominal Power	10W	20W
Solar Panel	12V 13W	12V 26W
Lithium Ion Battery	74WH 7.4V 10AH	148WH 7.4V 20AH
CCT	4,000K & 5,000K	4,000K & 5,000K
Lumen Output@5000K	1,000	2,000
CRI	> 70	> 70
LED Chip	OSRAM	OSRAM
Beam Angle	50° X 80°	50° X 80°
Waterproof Rate	IP65	IP65
Casting	PC & Aluminum	PC & Aluminum
Efficiency@5000K	100 lm/W	100 lm/W
* Charging Time	8-10hrs (1000W/m ²)	8-10hrs (1000W/m ²)
Run Time (@Full Power)	2-3 Days	2-3 Days
Operation Mode	First 4 hours 100% brightness, 25% brightness till dawn	First 4 hours 100% brightness, 25% brightness till dawn
* Operating Temperature	-4 °F to 149 °F	-4 °F to 149 °F
* Charging Temperature	32 °F to 113°F	32 °F to 113°F

* The temperature can impact the battery's charging and normal operation.

* The solar charge time data is base on 77 degree F ambient temperature with the panel pointed directly at the solar radiation. The standard radiation value is 1000W/m².

Ordering Information Chart


SERIES	WATTAGE	COLOR TEMPERATURE	MOUNTING OPTIONS	SIZE
STL-JUP=FOCUS	10=10W 1000 Lumens 20=20W 2000 Lumens	4=4000K 5=5000K	ST=GROUND MOUNT	13=13 INCHES 26=20 INCHES

- - - -

03 Installation

GROUND MOUNT


01

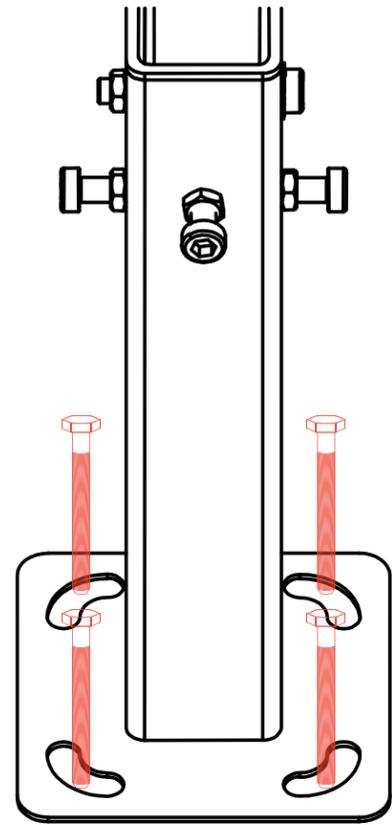

Secure Mounting
For signage near the ground, the FOCUS can use a drill installation into concrete, to create a secure, tightly bolted fixture.

- NOTES**
1. All screws and bolts must be tightened firmly.
 2. Only press the main power button once. The light will operate automatically at night.
 3. Please charge the product for 6-8 hours before use.


02

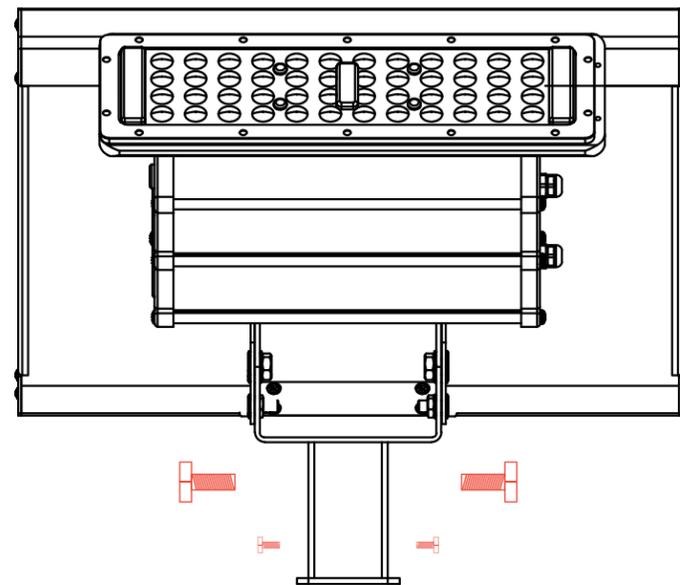

Attach light by using scale holes

03

THE RIGHT ANGLE
You can adjust the angles of your FOCUS solar light, ensuring that no matter the installation, you can provide a right angle in different weather, signs, or temperature situations.

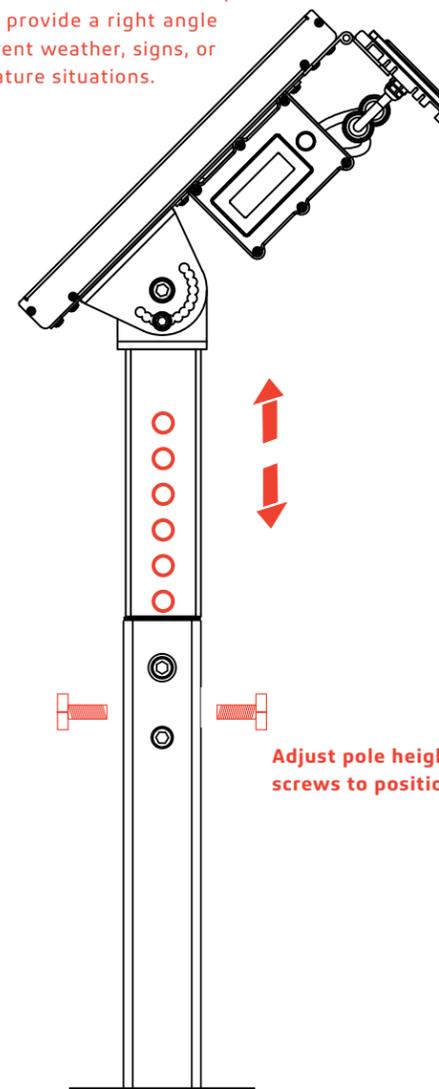

Adjust pole height, then tighten screws to position.

TIP
Use one bolt to set height, then tighten rest of the screws.


04




Optimize efficiency by rotation Panel and Light

04 Luminous Distribution

FOCUS 10W

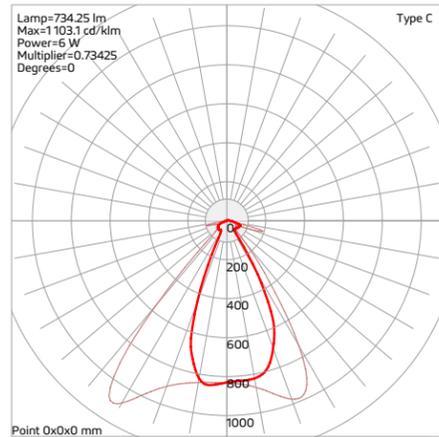

FOCUS 20W

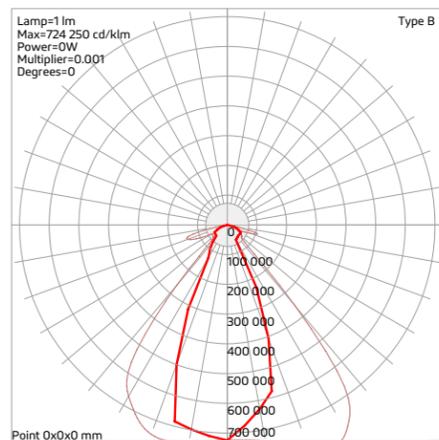

05 Warranty

FOCUS is covered by a 3 year limited warranty. FOCUS urban light warrants to the original purchaser that this product is free from defects in materials and workmanship for the period of 3 years from date of purchase. To obtain warranty service please contact your local distributor or sales rep for further instruction.

SOLTECH offers advanced LED technology that is eco-friendly and utilizes clean energy.



1460 Park Avenue.
Emeryville CA 94608 USA
www.soltechlighting.com

SOLTECH LLC reserves the right to update all product data sheets at any time. Consult SOLTECH marketing specialists for publication updates at hello@soltechlighting.com

*Copyright©2020–2021 SOLTECH LLC,
All Rights Reserved.*