

# FLF AREA LIGHT

15W~50W **DLC PREMIUM**



## TECHNICAL SPECIFICATIONS

<b>HOUSING</b>	ACD12 aluminum heat sink, Outdoor powder coating.
<b>VOLTAGE</b>	100~277V, 50~60Hz AC
<b>LED</b>	LumiLEDs
<b>EFFICACY</b>	130 LM/W
<b>LUMENS@5000K</b>	1,800~6,500 lumens
<b>POWER FACTOR</b>	>0.9
<b>BEAM ANGLE</b>	90° X 120°
<b>THD</b>	<20%
<b>OPERATING TEMP</b>	-40°F~104°F
<b>ALUMINUM LED BOARD</b>	High conductive, Waterproof, Aging resistance, Salt mist resistance, Long-life.
<b>CONTROLS / DIMMING</b>	Non-Dimmable
<b>CCT</b>	3000K, 4000K and 5000K
<b>CRI</b>	>80
<b>RATED LIFE</b>	70,000 hours

## PRODUCT NUMBER BUILDER

Example:STLFLF154WMBR


SOLTECH Wall Pack FLF 15 watt, 4000k, Wall mount installation, with a Bronze finish.

SERIES	WATT (W -8%~+5%)	COLOR TEMP (X)	MOUNTING OPTIONS (YY)	FINISH (ZZ)	VOLTAGE (V) (Blank)	OPTIC TYPE (Blank)	DIMMING (Blank)
<b>STLFLF</b>	15	<b>3=3000K</b>	<b>WM=WALL MOUNT</b>	<b>BR=BRONZE</b>	100~277	90° X 120°	Non-Dimmable
	30	<b>4=4000K</b>	<b>KN=KNUCKLE</b>				
	50	<b>5=5000K</b>					


**PRODUCT PARAMETER**

MODEL	DIMENSION (in)	VOLTAGE (V)	WATT (W -8%~+5%)	LUMENS @ 5000K(Lm)	EFFICACY (Lm/w)	OPTIC TYPE	DIMMING
STLFLF15XYYZZ	6.4X4.4X1.8 in	100-277	15	1,800	120	90° X 120°	Non-Dimmable
STLFLF30XYYZZ	9.0X6.8X2 in	100-277	30	3,900	130	90° X 120°	Non-Dimmable
STLFLF50XYYZZ	10X8.7X2 in	100-277	50	6,500	130	90° X 120°	Non-Dimmable


**DIMENSIONAL DRAWING**

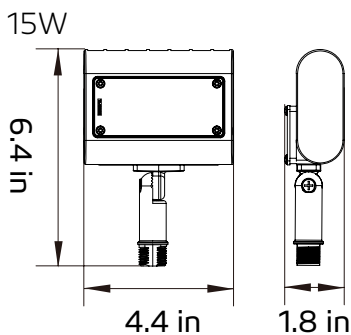


**DIMENSIONAL DRAWING**

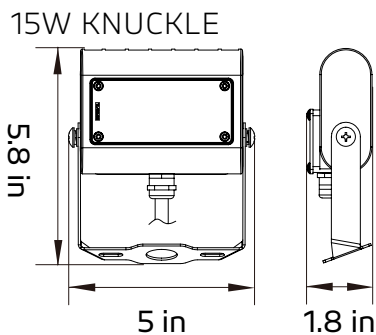


**PHOTOMETRY**

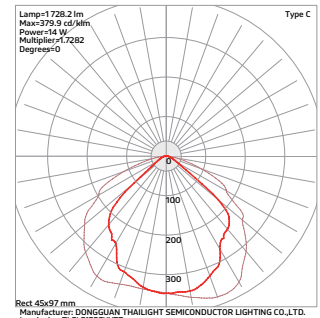


**DIMENSIONAL DRAWING**

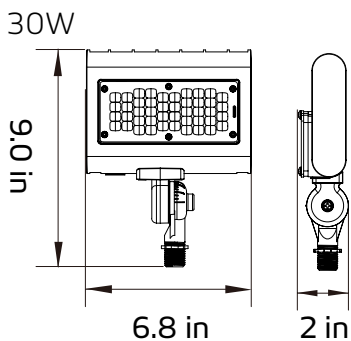


**DIMENSIONAL DRAWING**

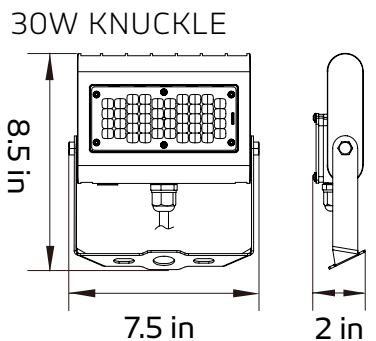


**PHOTOMETRY**

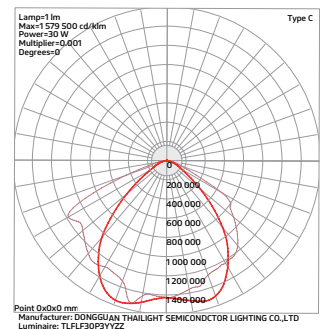

**DIMENSIONAL DRAWING**

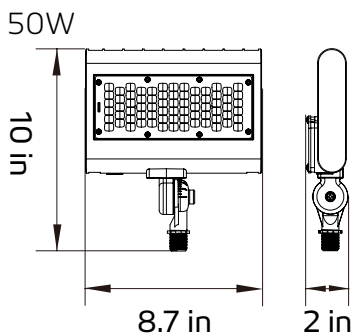

**DIMENSIONAL DRAWING**

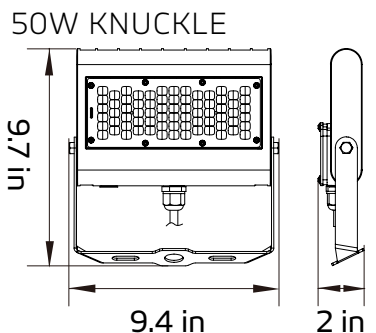

**PHOTOMETRY**

