

# WMG WALL PACK LIGHT


30W~120W **DLC PREMIUM**



Occupancy  
Microwave  
Sensor Option

## DARK SKY SHIELD

If need, we have **DARK SKY SHIELD** available.

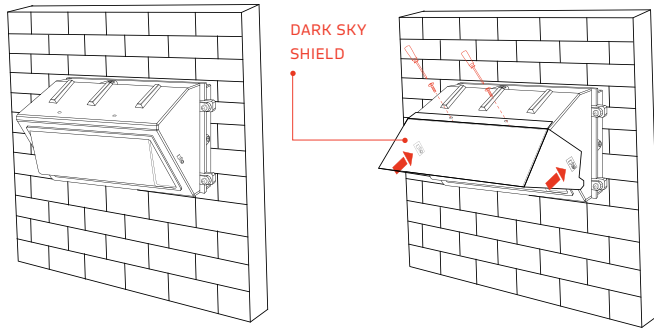

## PRODUCT NUMBER BUILDER

Example:STLWMG1004WMBR

SOLTECH Wall Pack WMG 100 watt, 4000K, Wall mount installation, with a Bronze finish.

## TECHNICAL SPECIFICATIONS

HOUSING	ACD12 aluminum heat sink, Outdoor powder coating.
VOLTAGE	100-277V, 60Hz AC
LED	LumiLEDs
EFFICACY	140 LM/W
LUMENS@5000K	4,200-17,100 lumens
POWER FACTOR	≥0.9
BEAM ANGLE	120°
THD	<20%
OPERATING TEMP	-4°F-104°F
ALUMINUM LED BOARD	High conductive, Waterproof, Aging resistance, Salt mist resistance, Long-life.
CONTROLS / DIMMING	0-10V Dimming
CCT	3000K, 4000K and 5000K
CRI	>80
RATED LIFE	70,000 hours


SERIES	WATT (W -8%~+5%)	COLOR TEMP (X)	MOUNTING OPTIONS (YY)	FINISH (ZZ)	VOLTAGE (V) (Blank)	OPTIC TYPE (Blank)	DIMMING (Blank)
STLWMG	30	3=3000K	WM=WALL MOUNT	BR=BRONZE	100-277	120°	Non-Dimmable
	50	4=4000K					0-10V/PWM/VR
	80	5=5000K					
	100						
	120						

**PRODUCT PARAMETER**

MODEL	DIMENSION (in)	VOLTAGE (V)	WATT (W -8%~+5%)	LUMENS @ 5000K(Lm)	EFFICACY (Lm/w)	OPTIC TYPE	DIMMING
STLWMG30XYZZ	8.5X8.6X9.8 in	100-277	30	4,200	140	120°	Non-Dimmable
STLWMG50XYZZ	15.1X9.3X7.5 in	100-277	50	7,100	142	120°	Non-Dimmable
STLWMG80XYZZ	15.1X9.3X7.5 in	100-277	80	11,600	145	120°	0-10V/PWM/VR
STLWMG100XYZZ	15.1X9.3X7.5 in	100-277	100	14,300	143	120°	0-10V/PWM/VR
STLWMG120XYZZ	18.3X9.1X9.4 in	100-277	120	17,100	143	120°	0-10V/PWM/VR


**DIMENSIONAL DRAWING**

30W

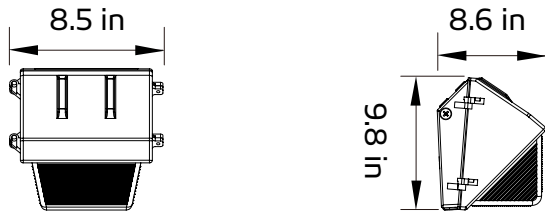


**DIMENSIONAL DRAWING**

50W, 80W & 100W

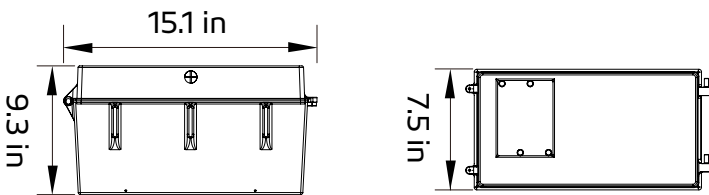


**DIMENSIONAL DRAWING**


120W

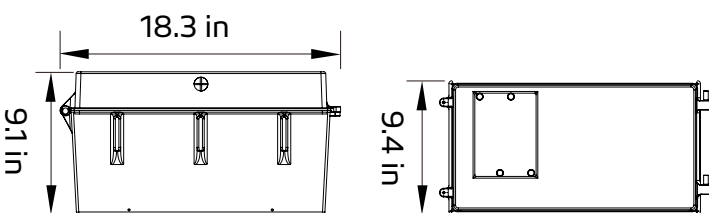

**PHOTOMETRY**

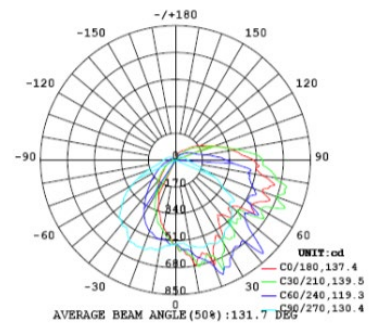

**PHOTOMETRY**

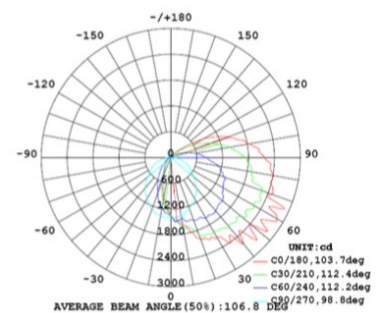

**PHOTOMETRY**

