


# WMW WALL PACK LIGHT

30W~50W **DLC PREMIUM**



## INSTALLATION DIAGRAM

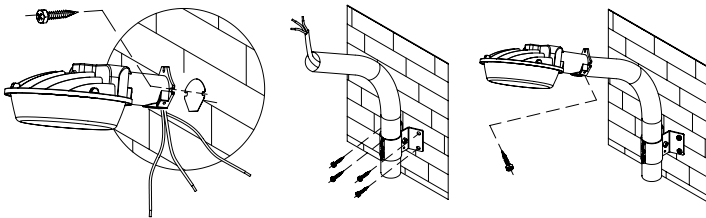

## PRODUCT NUMBER BUILDER

Example: STLWMW504WMBR

SOLTECH Wall Pack WMW 50 watt, 4000K, Wall mount installation, with a Bronze finish.

## TECHNICAL SPECIFICATIONS

<b>HOUSING</b>	ACD12 aluminum heat sink, Outdoor powder coating.
<b>VOLTAGE</b>	100-277V, 50-60Hz AC
<b>LED</b>	LumiLEDs
<b>EFFICACY</b>	135 LM/W
<b>LUMENS@5000K</b>	4,050-6,500 lumens
<b>POWER FACTOR</b>	>0.9
<b>BEAM ANGLE</b>	150°
<b>THD</b>	<20%
<b>OPERATING TEMP</b>	-4°F-104°F
<b>ALUMINUM LED BOARD</b>	High conductive, Waterproof, Aging resistance, Salt mist resistance, Long-life.
<b>CONTROLS / DIMMING</b>	0-10V Dimming
<b>CCT</b>	3000K, 4000K and 5000K
<b>CRI</b>	>80
<b>RATED LIFE</b>	70,000 hours



SERIES	WATT (W -8%~+5%)	COLOR TEMP (X)	MOUNTING OPTIONS (YY)	FINISH (ZZ)	VOLTAGE (V) (Blank)	OPTIC TYPE (Blank)	DIMMING (Blank)
STLWMW	30	3=3000K	WM=WALL MOUNT	BR=BRONZE	100-277	150°	0-10V/PWM/VR
	50	4=4000K					
		5=5000K					

## PRODUCT PARAMETER

MODEL	DIMENSION (in)	VOLTAGE (V)	WATT (W -8%~+5%)	LUMENS @ 5000K(Lm)	EFFICACY (Lm/w)	OPTIC TYPE	DIMMING
STLWMW30XYZZ	10.4X7.9X4.2 in	100-277	30	4,050	135	150°	0-10V/PWM/VR
STLWMW50XYZZ	10.4X7.9X4.2 in	100-277	50	6,500	135	150°	0-10V/PWM/VR

## DIMENSIONAL DRAWING

30W & 50W



## PHOTOMETRY

