


CLF CANOPY LIGHT

150W **DLC PREMIUM**



INSTALLATION DIAGRAM

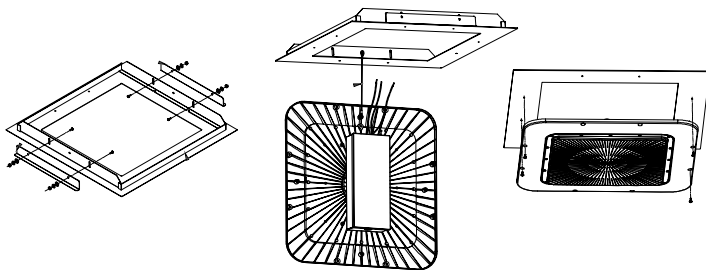

PRODUCT NUMBER BUILDER

Example:STLCLF1504CLWH

SOLTECH CLF Canopy Light 150 watt, 4000K, Ceiling installation, with a White finish.

TECHNICAL SPECIFICATIONS

HOUSING	ADC12 aluminum heat sink, Outdoor powder coating.
VOLTAGE	100-277V, 50-60Hz AC
LED	LumiLEDs
EFFICACY	135 LM/W
LUMENS@5000K	20,183 lumens
POWER FACTOR	>0.9
BEAM ANGLE	110° X 110°
THD	<20%
OPERATING TEMP	-40°F-122°F
ALUMINUM LED BOARD	High conductive, Waterproof, Aging resistance, Salt mist resistance, Long-life.
CONTROLS / DIMMING	0-10V Dimming
CCT	4000K and 5000K
CRI	>70
RATED LIFE	70,000 hours



SERIES	WATT (W -8%~+5%)	COLOR TEMP (X)	MOUNTING OPTIONS (YY)	FINISH (ZZ)	VOLTAGE (V) (Blank)	OPTIC TYPE (Blank)	DIMMING (Blank)
STLCLF	150	4=4000K	PD=PENDANT	WH=WHITE	100-277	110° X 110°	0-10V DIMMING
		5=5000K					

PRODUCT PARAMETER

MODEL	DIMENSION (in)	VOLTAGE (V)	WATT (W -8%~+5%)	LUMENS @ 5000K(Lm)	EFFICACY (Lm/w)	OPTIC TYPE	DIMMING
STLCLF150XYZZ	20.5X20.5X7.9 in	100-277	150	20,183	135	110°X110°	0-10V/PWM/VR

DIMENSIONAL DRAWING

150W



PHOTOMETRY

